

# VELZENER

Maschinen GmbH

Our best one for  
plasterers!



## PUTZKNECHT S48-easy

The mixing pump for  
ready mixed dry mortars

# PUTZKNECHT S48-easy

Our best one for the plasterer! UELZENER keeps this promise with a high-quality and reasoned mixing pump.

The various possibilities of the new PUTZKNECHT S48-easy open a new dimension in the processing of ready-mix mortars, in short time ready to start and careful in its work.

The PUTZKNECHT S48-easy grants more time for the substantial work and creative plaster work, as well as high quality of workmanship and economic efficiency.

The PUTZKNECHT S48-easy is the reliable partner on the building site. With this mixing pump you will put easily all types of mortar on the wall - day by day.

The genius of the PUTZKNECHT S48-easy is the balance in performance, reliability and purchase price for a variety of daily work like plaster mortar, adhesive mortar, reinforcement mortar, isolation mortar, filling mortar, self-levelling mortar.

The PUTZKNECHT S48-easy can do everything, professionally, without larger alteration and that even unbelievably fast - the new dimension on the building site.

*New, nearly maintenance-free compressor DELTA 2*




## Technology that inspires and convinces

- maintenance-free gear motors
- large storage vessel in high-speed cleaning version
- practical material stop valve at the storage vessel
- wear resistant universal conveying screw for all materials
- exchangeable pump parts for all practical applications
- universal mixing shaft for interior and external plaster
- removable suction flange for different pump diameters
- new, nearly maintenance-free compressor with automatic shut-off
- safety switches at the mixing tube


## Technical Data

Drive / performance	Pump 5,5 kW, conveying screw 1,1 kW
Operating voltage	400V/50Hz
Mixer revolutions	400 min <sup>-1</sup>
Conveying output	standard 22 l/min (5 -30 l/min *)
Conveying pressure	30 bar *)
Conveying distance	max. 40m *)
Required water pressure	min. 3 bar
compressor capacity	approx. 180 l/min
Loading height	1010 mm
Height / Width / Length	1540 / 660 / 1420 mm
Weight without compressor	198 kg

\*) depending on material, consistency, grain size and hose length and -diameter

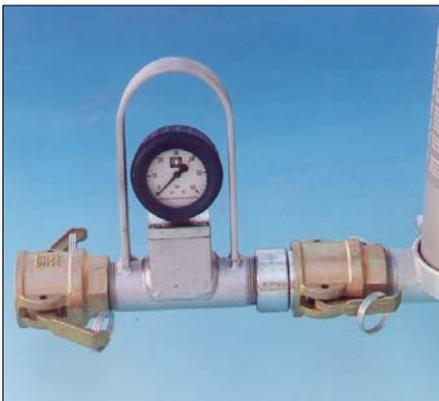

*The pump outlet is equipped with coupling SKM35 and mortar pressure gauge according to the safety rules of the German trade association.*

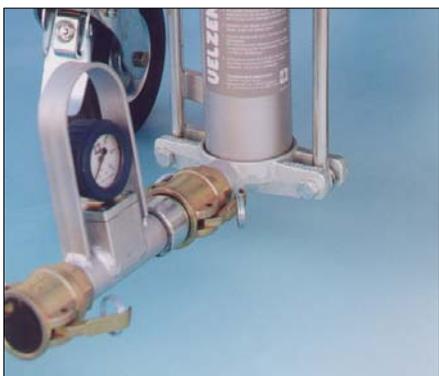

*The standard PUTZKNECHT S48-easy is equipped with screw pump parts UE4 silver and achieves 22 l/min. Depending upon application further conveying capacities from 5-30l/min can be obtained by exchanging the pump parts. Self-levelling screed work is possible with conveying outputs up to 50l/min.*

Technical changes reserved  
Pros-S48-easy-eng.ppt 06/2010

*The mixing shaft motor is removed for easier transport.*



## Standard scope of delivery:

- Pump parts UE4 silver
- Spray gun with nozzle 14mm
- Mortar hose 10m / ID25 / SK24
- Air hose 10m / ID 3/8" / GK
- Compressor Delta 2
- Water pressure booster pump
- Adapter SKV35 /SKM24
- Pressure control gauge SKM35
- Cleaning and turning tool
- 4 Screw keys
- 2 Sponge balls
- 4 Swivelling wheels (2 Brakes)

Dealer



**UELZENER MASCHINEN GMBH**

Stahlstrasse 26-28

D-65428 Rüsselsheim, Germany

T: +49 6142-17768-0 F: +49 6142-17768-50

e-mail: [contact@uelzener-ums.de](mailto:contact@uelzener-ums.de)

Website: [www.uelzener-ums.de](http://www.uelzener-ums.de)