

UELZENER

MASCHINEN GMBH





UELZENER S60GA-3

Mixing pump for quick setting gypsum



The modules of the unit UELZENER S60-GA3

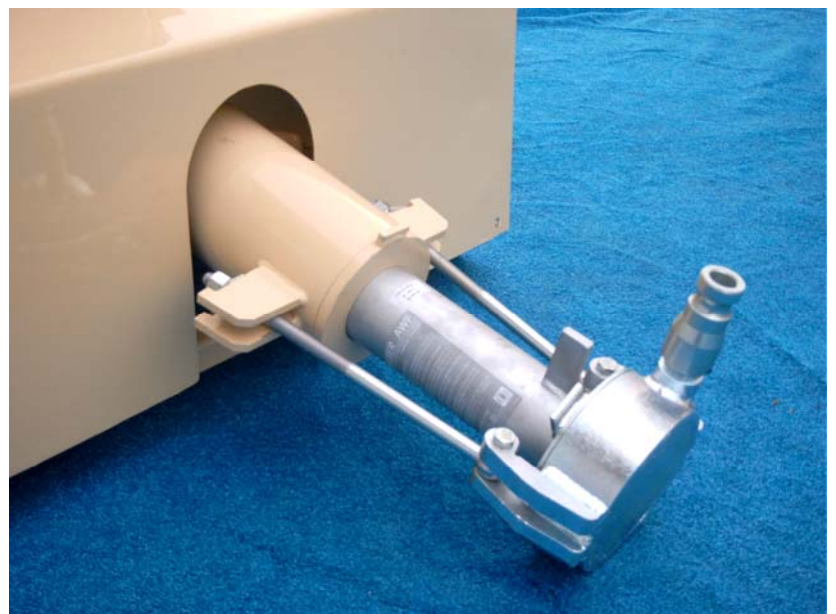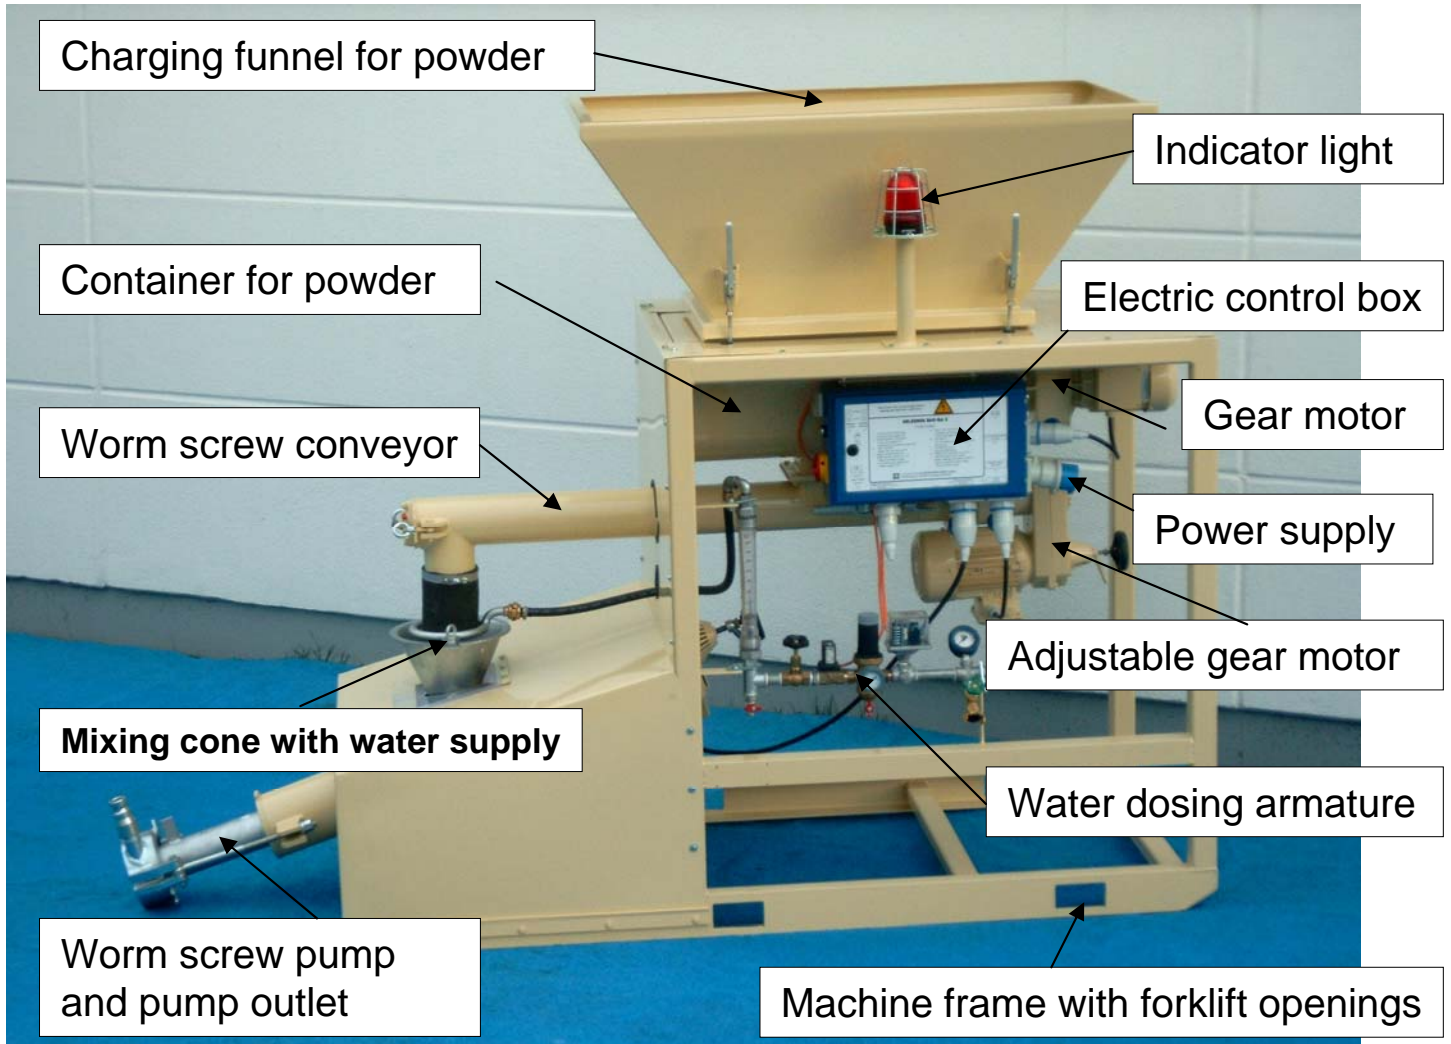

UELZENER S60GA-3

Technical data

Pump drive	: adjustable gear motor
Power	: 4 kW
Speed	: 60 – 482 min ⁻¹
Conveying worm drive	: adjustable gear motor
Power	: 1,5 kW
Speed	: 30 – 150 min ⁻¹
Worm screw conveyor drive	: constant gear motor
Power	: 1,1 kW
Speed	: 50 min ⁻¹
Electric supply	: Socket CEE 532/9h (5 pole-system)
Voltage	: 220V / 50Hz three phase
Control voltage	: 42V / 50Hz
Output *	: interchangeable worm pump types to preset the output Type UE 4 silver for approx. 10 – 30 l/min* (standard) Type UE 8 for approx. 15 – 40 l/min* Type UE 45/7 for approx. 20 -- 45 l/min*
	*) depending of type of worm pump, motor speed and conveying pressure
Pump pressure	: max 20 bars, depending of type of worm pump
Pump outlet	: Quick-action coupling SKM35, ID25
Water supply size	: min 3/4"
Required water pressure	: min 4 bars
Dimensions	: length/ width/ height: 2600 x 950 x 1850 (standard)
Weight	: 500 kg (standard version)

UELZENER MACHINEN GMBH

Stahlstrasse 26-28
D-65428 Rüsselsheim / Germany
Tel. +49-6142-17768-0 Fax: +49-6142-17768-50
e-mail: contact@uelzener-ums.de
Internet: www.uelzener-ums.de